




1000 Vibration Tester

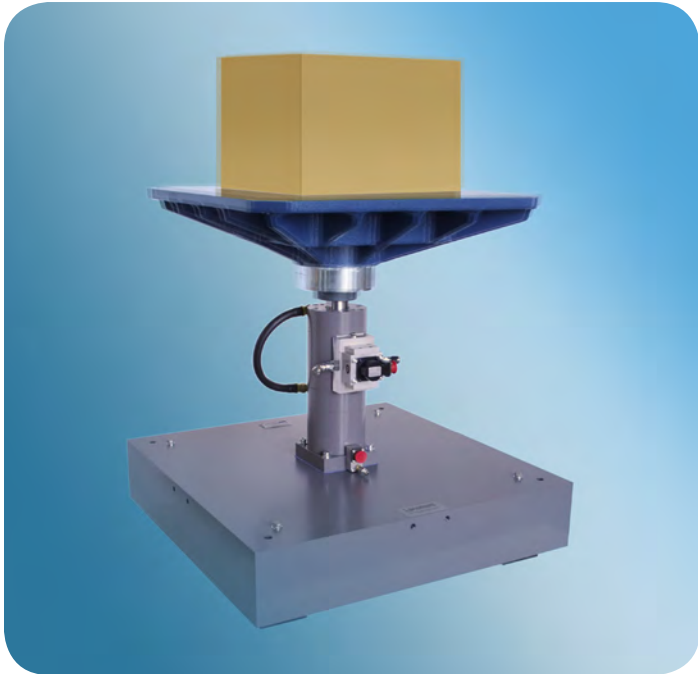

The Model 1000 Vibration Test System is designed to test small and lightweight objects and can perform a wide range of testing specifications. Both sinusoidal vibration tests and random vibration tests are possible for product and package testing. The Model 1000 performs testing per ASTM, ISTA, ISO and other common industry test specifications.

For testing small products or packages, the Model 1000 might be the vibration system best suited to your needs. Each vibration system features a table sized to the application, a rugged hydraulic actuator, a reliable hydraulic power supply, and Lansmont's TouchTest Vibration Control System.

PERFORMANCE SPECIFICATIONS	Standard Performance	High Performance
Frequency Range	1 – 300 Hz.	1 – 500 Hz.
Maximum Stroke Options (peak-to-peak)	2.5 in. (6.4 cm) 4 in. (10.2 cm) 6 in. (15.2 cm)	2.5 in. (6.4 cm) 4 in. (10.2 cm)
Actuator Stall Force (at 3000 psi (207 bar))	1225 lbs. (5.4 kN)	1225 lbs. (5.4 kN)
Actuator Dynamic Force (at 3000 psi (207 bar))	816 lbs. (3.6kN)	816 lbs. (3.6 kN)



1000 Vibration Tester

Lansmont
Field-to-Lab®

SPECIFICATIONS

PHYSICAL

Table Sizes 15.8 in. (40 cm) square 25.6 in. (65 cm) square
33.5 in. (85 cm) square

Standard Hole Patterns 6 in. grid, 3/8-16 Stainless Steel inserts
15 cm grid, M10 x 1.5 Stainless Steel inserts

POWER REQUIREMENTS

	System	Controls
Voltage	115 – 230 VAC, 230 – 460 VAC	100 – 230 VAC
Frequency	50, 60 Hz.	50, 60 Hz.
Phase	Single (115 – 230 VAC) Three (230 – 460 VAC)	Single Phase


FACILITY REQUIREMENTS

Cooling Water The Model 1000 HPS has a built-in cooling fan and does not require cooling water.

Plant Air The Model 1000 does not require plant air.


SYSTEM DRAWING

SIDE VIEW

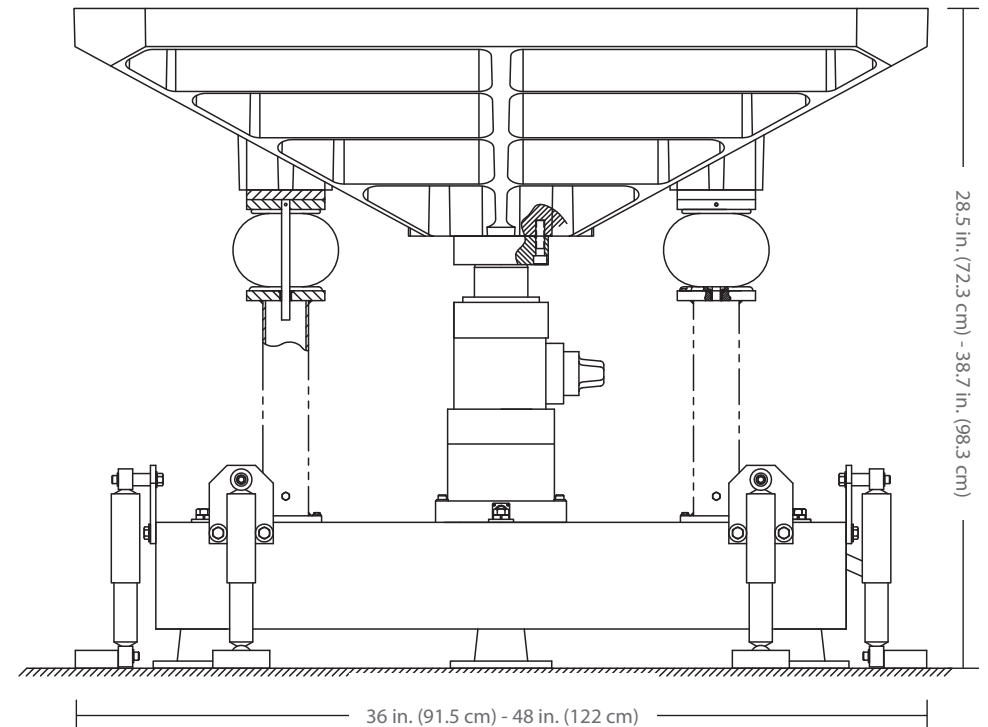



1800 Vibration Tester

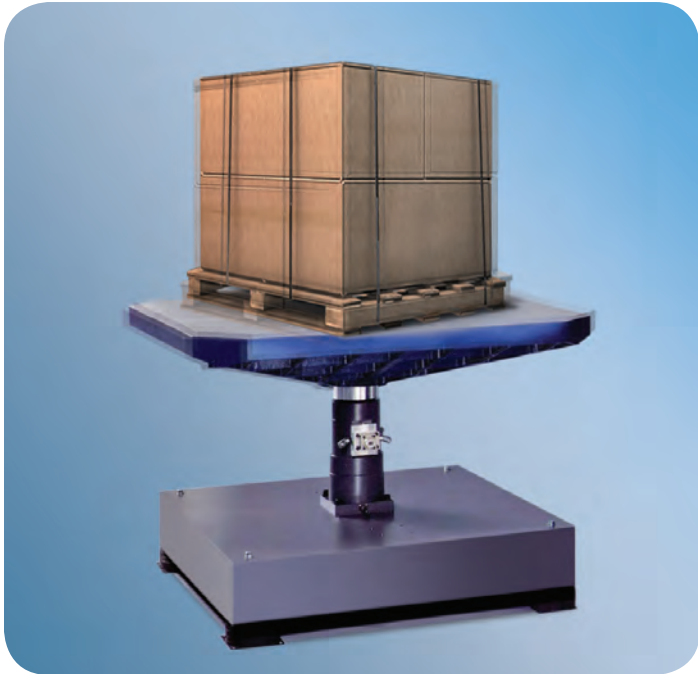

The Model 1800 Vibration Test System will perform a wide range of testing applications. The system runs resonance search and fixed-frequency dwell tests for product evaluation. Additionally, the 1800 is used for distribution simulation, referencing ASTM, ISTA, ISO and other common industry test specifications, as well as test profiles created from SAVER™ environmental data.

For testing small products to light pallet loads, Lansmont will configure a Model 1800 that will meet your needs. Each vibration system features a table sized to the application, a rugged hydraulic actuator, a reliable hydraulic power supply, and Lansmont's TouchTest Vibration Control System.

PERFORMANCE SPECIFICATIONS	Standard Performance	High Performance
Frequency Range	1 – 300 Hz.	1 – 500 Hz.
Maximum Stroke Options (peak-to-peak)	2.5 in. (6.4 cm) 4 in. (10.2 cm) 6 in. (15.2 cm)	2.5 in. (6.4 cm) 4 in. (10.2 cm)
Actuator Stall Force (at 3000 psi (207 bar))	4566 lbs. (20.3 kN)	4566 lbs. (20.3 kN)
Actuator Dynamic Force (at 3000 psi (207 bar))	3044 lbs. (13.5 kN)	3044 lbs. (13.5 kN)



1800 Vibration Tester



SPECIFICATIONS

PHYSICAL

Table Sizes	25.6 in. (65 cm) square	33.5 in. (85 cm) square
	48 in. (122 cm) square	60 in. (152 cm) square
	72 in. (183 cm) square	

Standard Hole Patterns	6 in. grid, 3/8-16 Stainless Steel inserts
	15 cm grid, M10 x 1.5 Stainless Steel inserts

POWER REQUIREMENTS


	System	Controls
Voltage	200 – 460 VAC	100 – 240 VAC
Frequency	50, 60 Hz.	50, 60 Hz.
Phase	Three Phase	Single Phase

FACILITY REQUIREMENTS

Cooling Water	6 gpm at 60°F (15.5°C at 23 L/min.)
Plant Air	80 psi (552 kPa) for 1-G Supports (optional)


SYSTEM DRAWING

SIDE VIEW

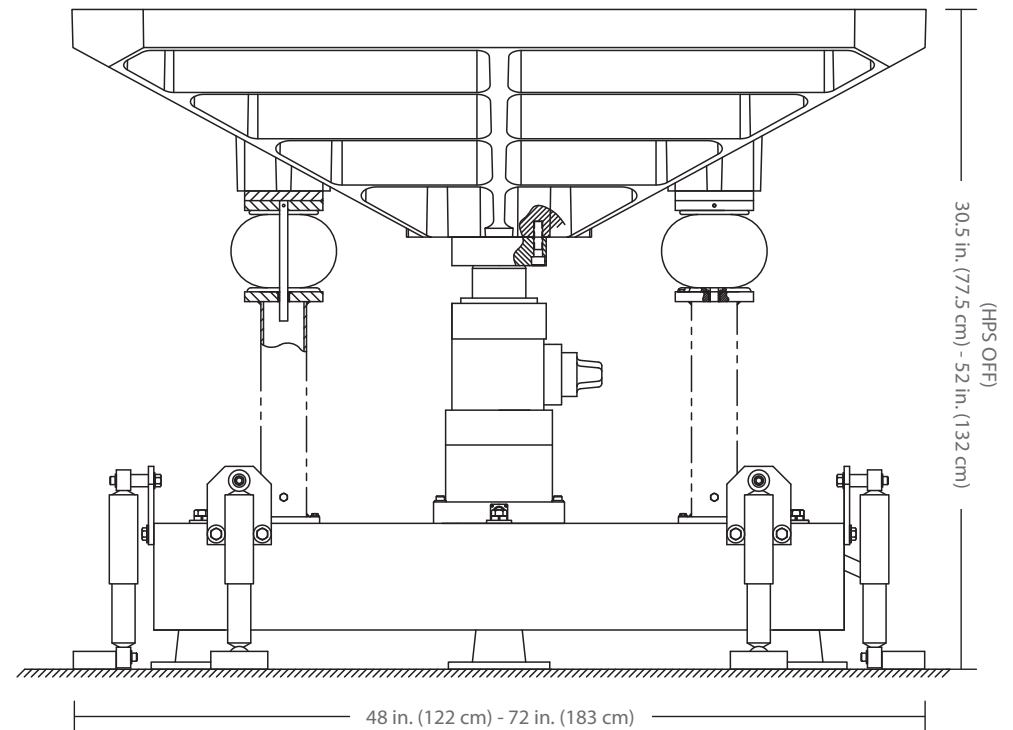



6200 Vibration Tester

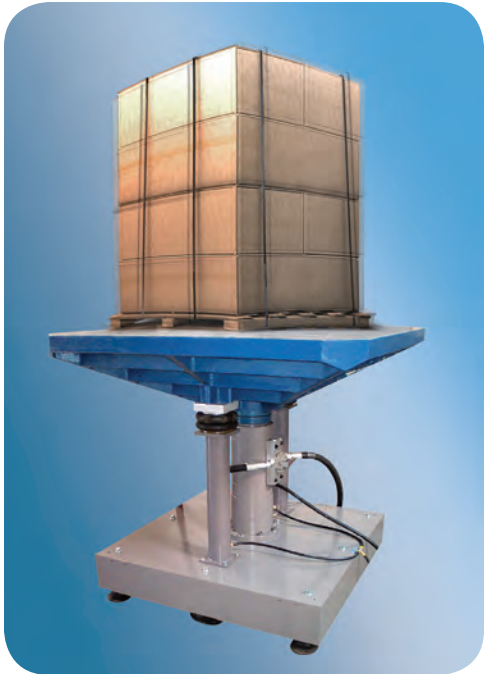

The Model 6200 Vibration Test System has a longer stroke actuator which makes the system design more versatile for performing low frequency, high energy vibration test profiles. The actuator force and stroke capabilities make the Model 6200 the ideal vibration system for Field-to-Lab[®] test protocols. The Model 6200 is also used to perform testing per ASTM, ISTA, ISO and other common industry test specifications.

For testing products, individual packages and unitized loads, Lansmont will configure a Model 6200 that will meet your needs. Each vibration system features a table sized to the application, a rugged hydraulic actuator, a reliable hydraulic power supply, and Lansmont's TouchTest Vibration Control System.

PERFORMANCE SPECIFICATIONS	Standard Performance	High Performance
Frequency Range	1 – 300 Hz.	1 – 500 Hz.
Maximum Stroke Options (peak-to-peak)	2.5 in. (6.4 cm) 4 in. (10.2 cm) 6 in. (15.2 cm)	2.5 in. (6.4 cm) 4 in. (10.2 cm)
Actuator Stall Force (at 3000 psi (207 bar))	7404 lbs. (32.9 kN)	7404 lbs. (32.9 kN)
Actuator Dynamic Force (at 3000 psi (207 bar))	4936 lbs. (21.9 kN)	4936 lbs. (21.9 kN)



6200 Vibration Tester



SPECIFICATIONS

PHYSICAL

Table Sizes	33.5 in. (85 cm) square	36 in. (91 cm) square
	48 in. (122 cm) square	60 in. (152 cm) square
	72 in. (183 cm) square	

Standard Hole Patterns	6 in. grid, 3/8-16 Stainless Steel inserts
	15 cm grid, M10 x 1.5 Stainless Steel inserts

POWER REQUIREMENTS


	System	Controls
Voltage	200 – 460 VAC	100 – 240 VAC
Frequency	50, 60 Hz.	50, 60 Hz.
Phase	Three Phase	Single Phase

FACILITY REQUIREMENTS

Cooling Water	Standard HPS – 6 gpm at 60°F (23 L/min. at 15.5°C)
	High Performance HPS – 17 gpm at 60°F (64 L/min. at 15.5°C)
Plant Air	80 psi (552 kPa) for 1-G Supports (optional)

SYSTEM DRAWING

SIDE VIEW

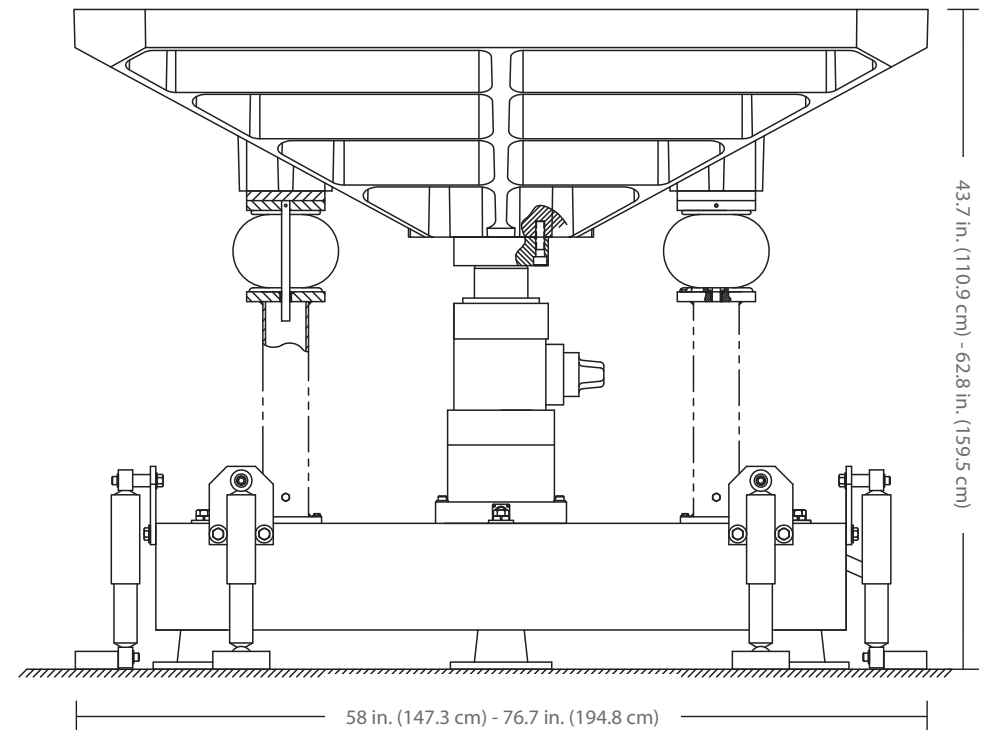



7000 Vibration Tester



The Model 7000 Vibration Test System has similar performance to the Model 1800 with the advantage of being able to accommodate heavier payloads. The system runs resonance search and fixed-frequency dwell tests for product evaluation and is also used for distribution simulation per ASTM, ISTA, ISO and other common industry test specifications. The system will also run test profiles created from SAVER™ environmental data.

For testing heavier test items or unitized loads, the Model 7000 might be the best choice for to satisfy your performance and payload requirements. Each vibration system features a table sized to the application, a rugged hydraulic actuator, a reliable hydraulic power supply, and Lansmont's TouchTest Vibration Control System.

PERFORMANCE SPECIFICATIONS

Frequency Range	1 – 300 Hz.
Maximum Stroke Options (peak-to-peak)	2.5 in. (6.4 cm) 4.0 in. (10.2 cm) 6.0 in. (15.2 cm)
Actuator Stall force (at 3000 psi (207 bar))	9171 lbs. (41 kN)
Actuator Dynamic Force (at 3000 psi (207 bar))	6114 lbs. (27.2 kN)



7000 Vibration Tester



SPECIFICATIONS

PHYSICAL

Table Sizes 48 in. (122 cm) square 60 in. (152 cm) square
72 in. (183 cm) square

Standard Hole Patterns 6 in. grid, 3/8-16 Stainless Steel inserts
15 cm grid, M10 x 1.5 Stainless Steel inserts

POWER REQUIREMENTS


	System	Controls
Voltage	200 – 460 VAC	100 – 240 VAC
Frequency	50, 60 Hz.	50, 60 Hz.
Phase	Three Phase	Single Phase

FACILITY REQUIREMENTS

Cooling Water Standard HPS – 6 gpm at 60°F (23 L/min. at 15.5°C)
Plant Air 80 psi (552 kPa) for 1-G Supports (optional)

SYSTEM DRAWING

SIDE VIEW

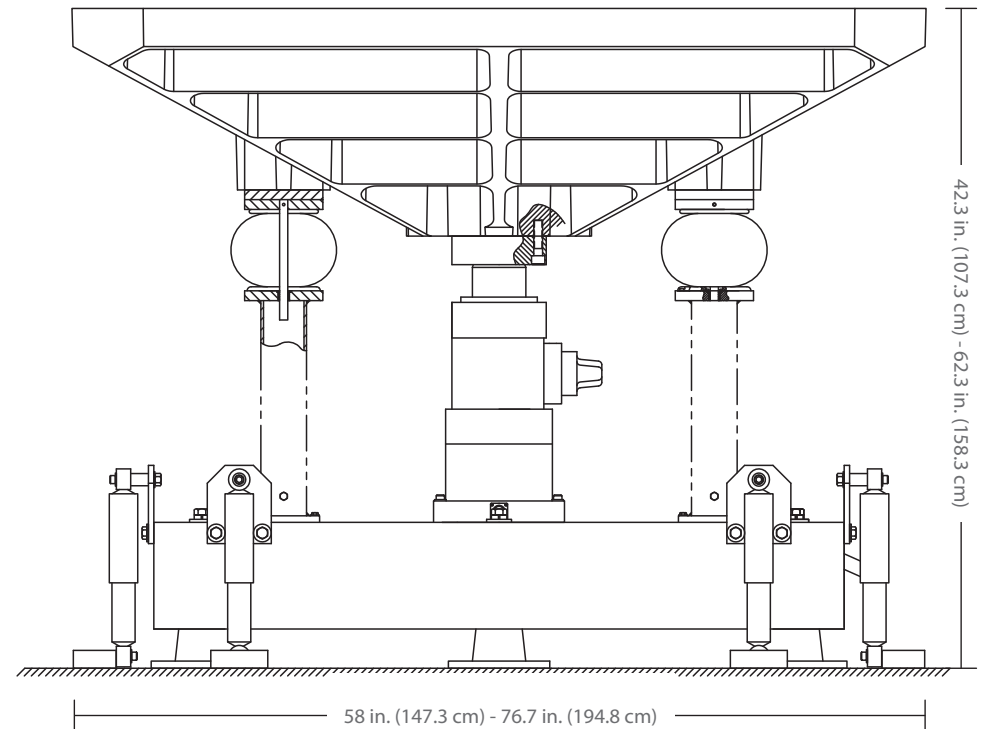



10000 Vibration Tester



The Model 10000 Vibration Test System is designed for testing large, heavy payloads. The actuator force and large table options make the Model 10000 the ideal vibration system for testing unit loads and large crated products. The Model 10000 performs testing per ASTM, ISTA, ISO and other common industry test specifications. The system will also run test profiles created from SAVER™ environmental data.

The Model 10000 has several table size choices to best cater to the intended testing application. In addition to the vibration table, each vibration system includes a rugged hydraulic actuator, a reliable hydraulic power supply, and Lansmont's TouchTest Vibration Control System.

PERFORMANCE SPECIFICATIONS

Frequency Range	1 – 300 Hz.
Maximum Stroke Options (peak-to-peak)	2.5 in. (6.4 cm) 4.0 in. (10.2 cm) 6.0 in. (15.2 cm)
Actuator Stall Force (at 3000 psi (207 bar))	12,370 lbs. (55 kN)
Actuator Dynamic Force (at 3000 psi (207 bar))	8247 lbs. (36.7 kN)



10000 Vibration Tester



SPECIFICATIONS

PHYSICAL

Table Sizes	48 in. (122 cm) square	60 in. (152 cm) square
	72 in. (183 cm) square	60 x 98 in. (152 x 249 cm)

Standard Hole Patterns	6 in. grid, 3/8-16 Stainless Steel inserts
	15 cm grid, M10 x 1.5 Stainless Steel inserts

POWER REQUIREMENTS


	System	Controls
Voltage	200 – 460 VAC	100 – 240 VAC
Frequency	50, 60 Hz.	50, 60 Hz.
Phase	Three Phase	Single Phase

FACILITY REQUIREMENTS

Cooling Water	Standard HPS – 6 gpm at 60°F (23 L/min. at 15.5°C)
Plant Air	80 psi (552 kPa) for 1-G Supports (optional)

SYSTEM DRAWING

SIDE VIEW

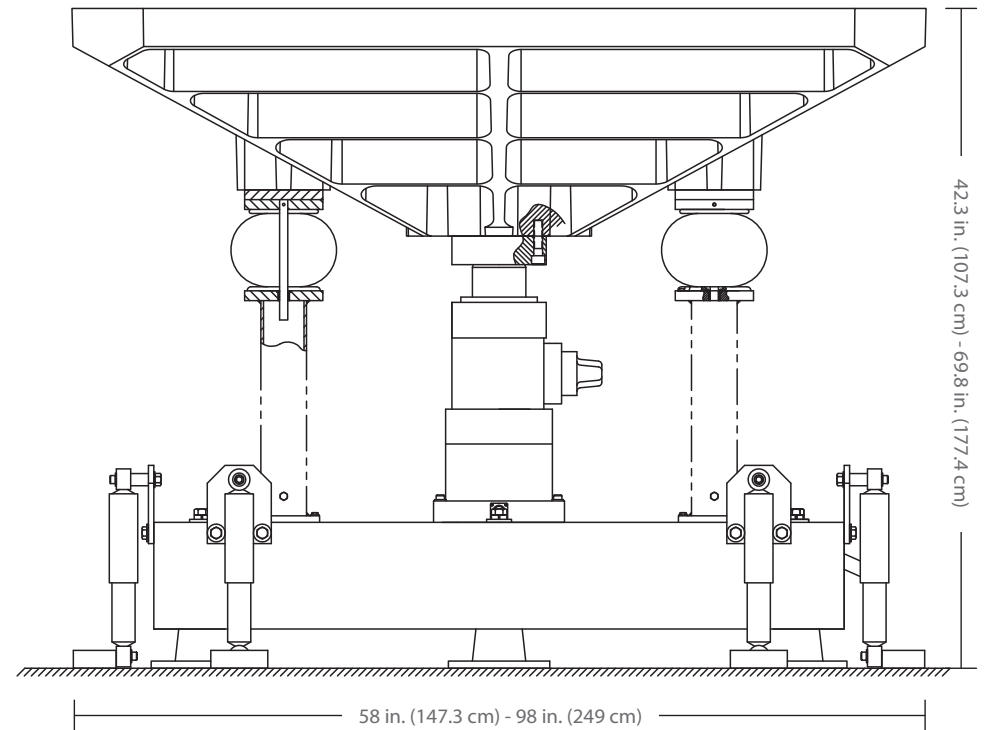



28000 Vibration Tester



The Model 28000 Vibration Test System is our most versatile test platform. The system can be outfitted with large components for testing bulky and heavy payloads. The Model 28000 can also be configured with high-performance components for testing to 500 Hz. or higher.

The Model 28000 Vibration Test System is designed for extreme payload or high performance testing. Each vibration system features a table sized properly for the intended applications, a rugged hydraulic actuator, a reliable hydraulic power supply, and Lansmont's TouchTest Vibration Control System.

PERFORMANCE SPECIFICATIONS	Standard Performance	High Performance
Frequency Range	1 – 300 Hz.	1 – 500 Hz.
Maximum Stroke Options (peak-to-peak)	2.5 in. (6.4 cm) 4 in. (10.2 cm) 6 in. (15.2 cm)	2.5 in. (6.4 cm) 4 in. (10.2 cm)
Actuator Stall Force (at 3000 psi (207 bar))	29,400 lbs. (131 kN)	29,400 lbs. (131 kN)
Actuator Dynamic Force (at 3000 psi (207 bar))	19,600 lbs. (87.3 kN)	19,600 lbs. (87.3 kN)



28000 Vibration Tester



SPECIFICATIONS

PHYSICAL

Table Sizes	36 in. (91 cm) square	48 in. (122 cm) square
	50 in. (127 cm) square	60 in. (152 cm) square
	60 x 98 in. (152 x 249 cm)	102 x 160 in. (259 x 406 cm)

Standard Hole Patterns	6 in. grid, 3/8-16 Stainless Steel inserts
	15 cm grid, M10 x 1.5 Stainless Steel inserts

POWER REQUIREMENTS


	System	Controls
Voltage	460 - 630 VAC	100 - 240 VAC
Frequency	50, 60 Hz.	50, 60 Hz.
Phase	Three Phase	Single Phase

FACILITY REQUIREMENTS

Cooling Water	Standard HPS – 10 gpm at 60°F (38 L/min. at 15.5°C)
Plant Air	80 psi (552 kPa) for 1-G Supports (optional)

SYSTEM DRAWING

SIDE VIEW

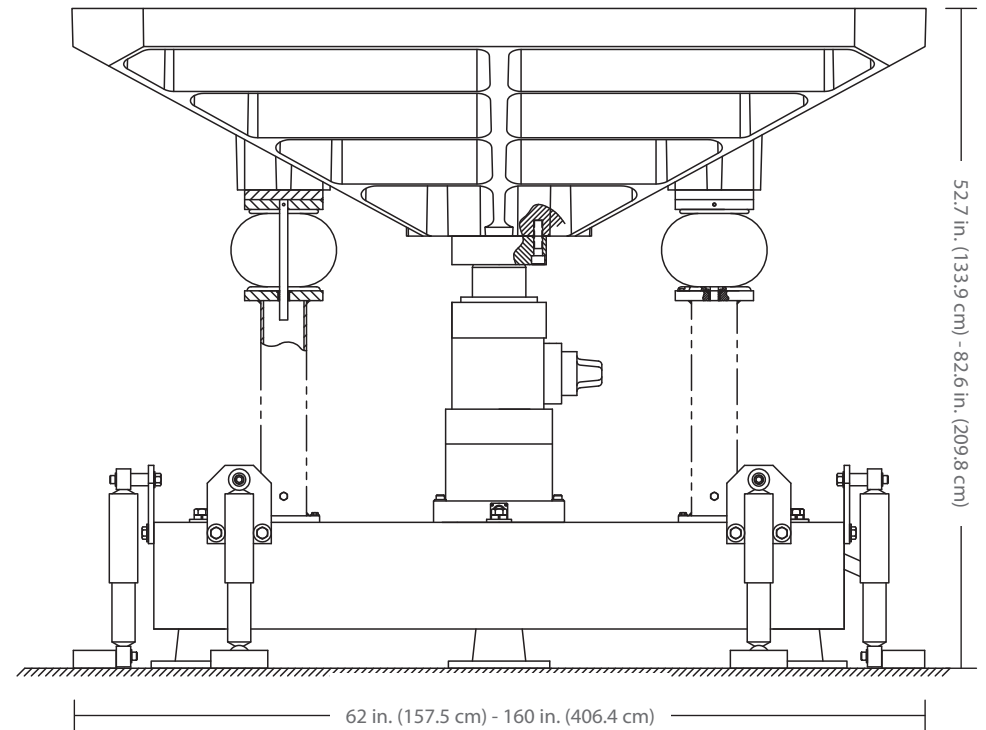



65000 Vibration Tester



The Model 65000 Vibration Test System is the largest force system in our line of vibration equipment. Designed for testing very large payloads, the Model 65000 can be outfitted with the large test platforms that we have to offer, measuring up to 10 ft. (3 m) in length.

The Model 65000 Vibration Test System is a highly custom vibration system which can be tailored specifically to any extreme payload vibration testing application. Each vibration system features a table sized properly for the intended applications, a rugged hydraulic actuator, a reliable hydraulic power supply, and Lansmont's TouchTest Vibration Control System.

PERFORMANCE SPECIFICATIONS

Frequency Range

1 – 300 Hz.

Maximum Stroke Options (peak-to-peak)

2.5 in. (6.4 cm)

4 in. (10.2 cm)

6 in. (15.2 cm)

Actuator Stall Force (at 3000 psi (207 bar))

63,720 lbs. (283.4 kN)

Actuator Dynamic Force (at 3000 psi (207 bar))

42,480 lbs. (189 kN)



65000 Vibration Tester



SPECIFICATIONS

PHYSICAL

Table Sizes 60 x 98 in. (152 x 249 cm) 82.7 x 98.4 in. (210 x 250 cm)
82.7 x 124 in. (210 x 315 cm)

Standard Hole Patterns 6 in. grid, 3/8-16 Stainless Steel inserts
15 cm grid, M10 x 1.5 Stainless Steel inserts

POWER REQUIREMENTS

	System	Controls
Voltage	200 – 460 VAC	100 – 240 VAC
Frequency	50, 60 Hz.	50, 60 Hz.
Phase	Three Phase	Single Phase

FACILITY REQUIREMENTS

Cooling Water Standard HPS –10 gpm at 60°F (38 L/min. at 15.5°C)

Plant Air 80 psi (552 kPa) for 1-G Supports (optional)

SYSTEM DRAWING

SIDE VIEW

